
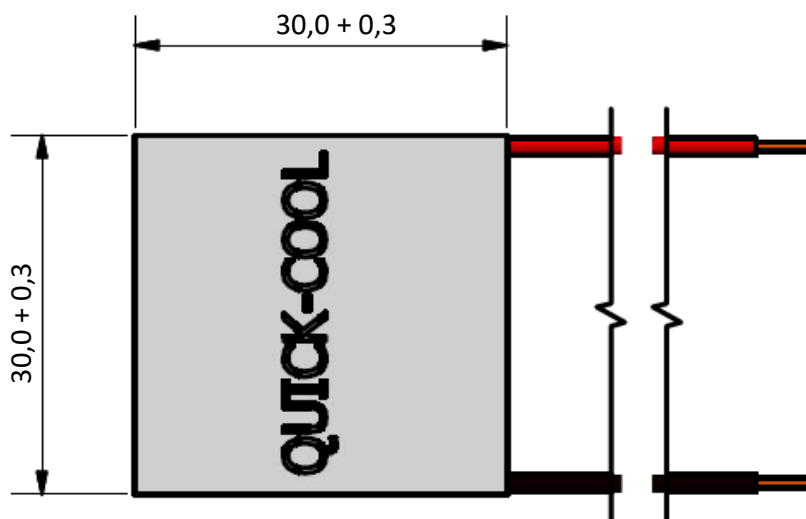


QC-127-1.0-3.9 X₁X₂

| | | |
|----------------------------|--------|--|
| I _{max} (amp) | 4,3 A | ΔT = ΔT _{max} ; Th = 25°C ± 0.5 K |
| U _{max} (volt) | 14,4 V | ΔT = ΔT _{max} ; Th = 25°C ± 0.5 K |
| ΔT _{max} (kelvin) | -71 K | I = I _{max} ; Th = 25°C ± 0.5 K; Q = 0 W |
| Q _{max} (watt) | 36,1 W | I = I _{max} ; Th = 25°C ± 0.5 K; ΔT = 0 K |
| AC resistance (ohm) | 3,05 Ω | 25°C ± 0.5 K |

Environment: dry air, N₂
 tolerances for thermal and electrical parameters ± 10%
 dimensions in millimeters

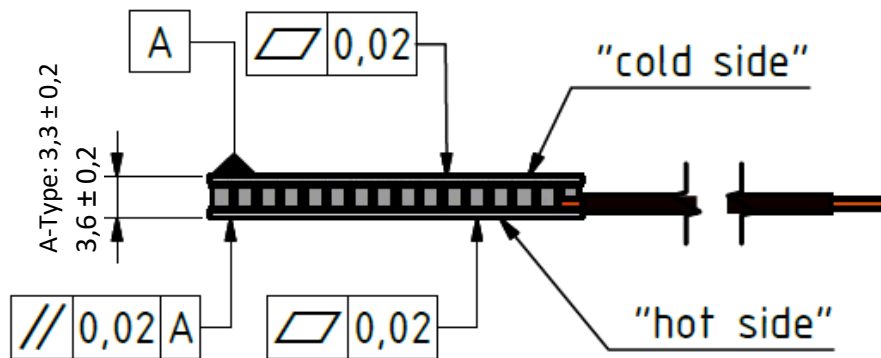


| | |
|--|---|
| OPTIONS: X1=A | T _{max} =100°C |
| X1=M | T _{max} =200°C; high cycle resistance |
| X1=MM | T _{max} =200°C; double high cycle resistance |
| X2=none | not sealed |
| X2=S | silicone sealed |
| X2=X | epoxy sealed |
| other specials: please contact Quick-Ohm | |

cold side and hot side ceramics: Al₂O₃, white 96%
 RoHS 2002/95/EC compliant

QC-127-1.0-3.9


T_{hot} :
25°C

cooling power
↑

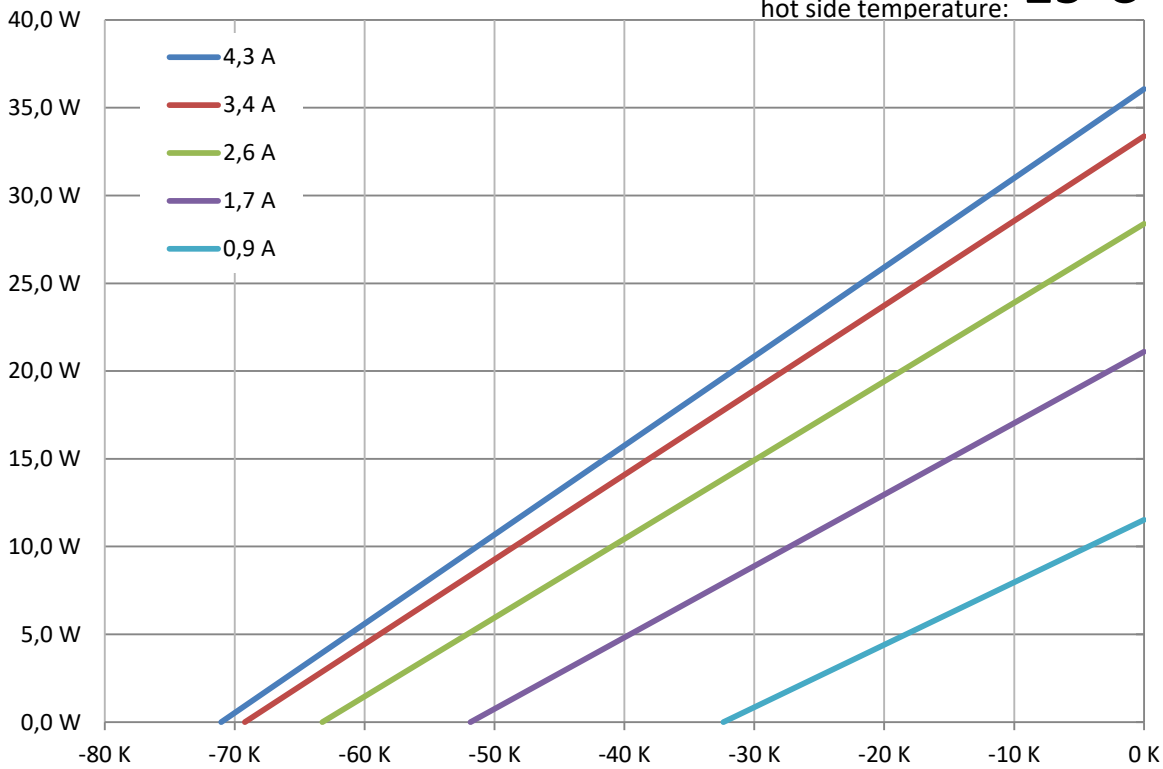

← $\Delta T = T_{cold} - T_{hot}$

↑ module voltage

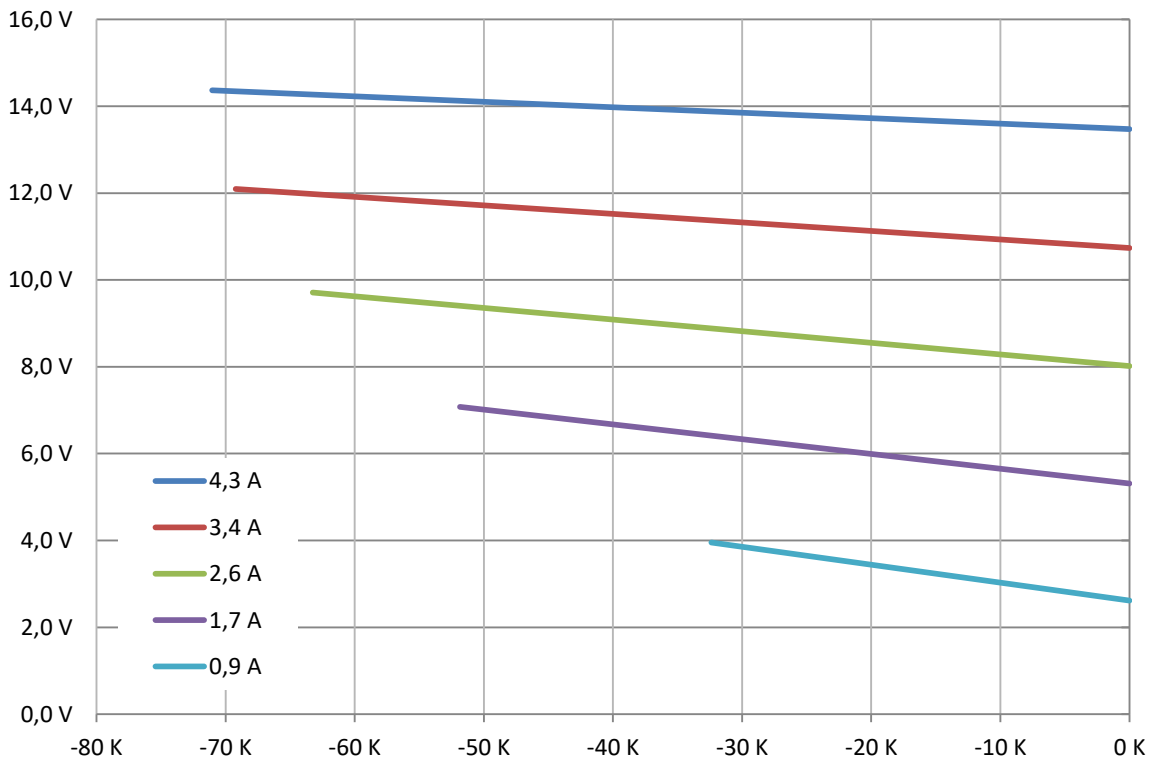

$R_{th} = 3,66 \text{ K/W}$

← $\Delta T = T_{cold} - T_{hot}$


QC-127-1.0-3.9

T_{hot} :

50°C

cooling power
↑

hot side temperature:

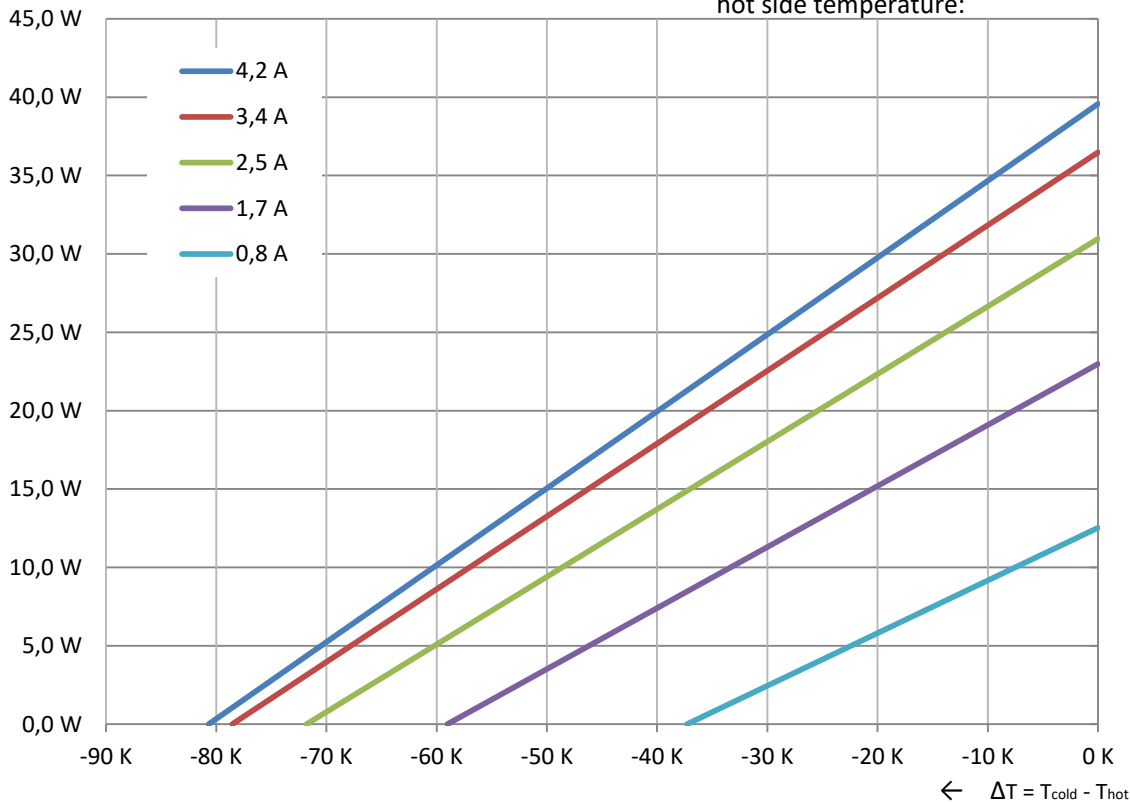

module voltage

