


Thermoelectric module ÆCG-241-1.0-1.3

Performance Data

V_{OC}, V	12.5	$T_{hot}=+175^{\circ}C, T_{cold}=+50^{\circ}C$
V_{load}, V	6.3	
R_{load}, Ohm	8.4	
W_{load}, W	4.7	
R_{in}, Ohm	8.4	
Module AC resistance, Ohm	4.5	$25 \pm 0.5^{\circ}C$


Tolerances for thermal and electrical parameters $\pm 10\%$

Dimensions in millimeters

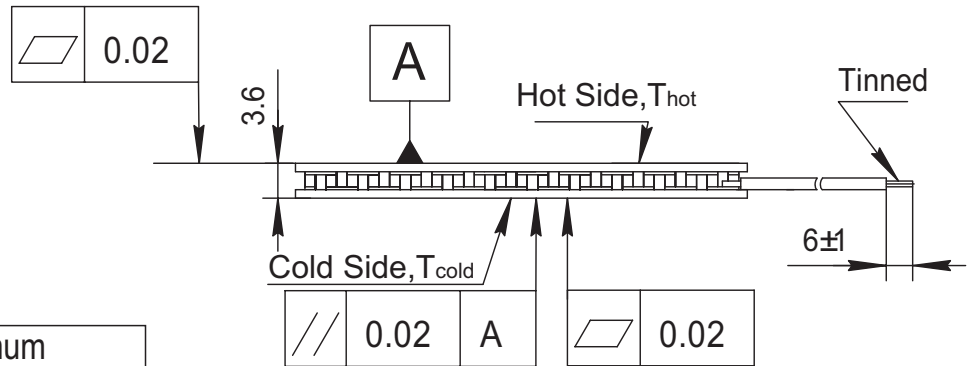

Options


Lead wire insulation	Maximum processing temperature
Silicone	180°C
PTFE	200°C

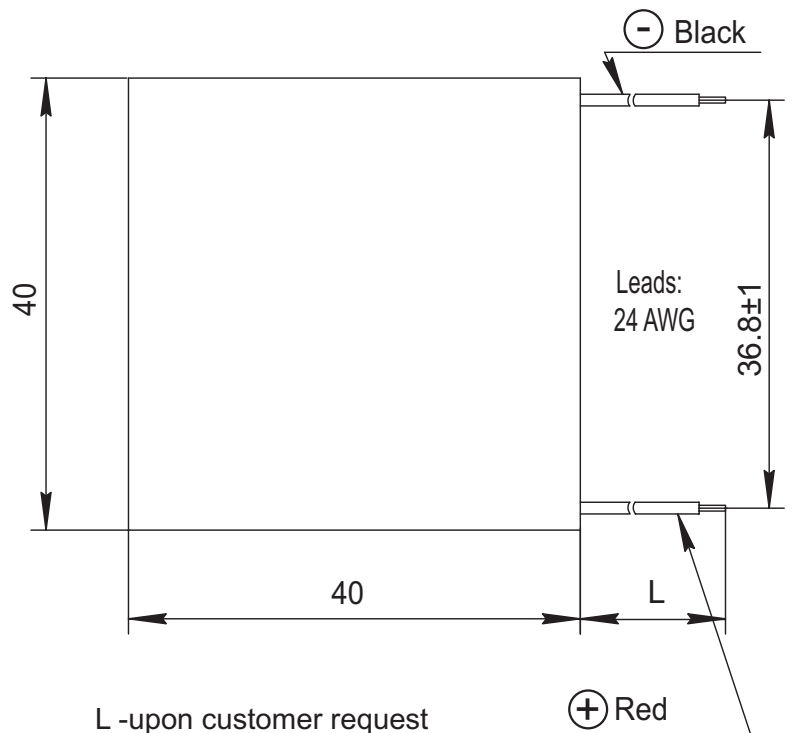

Additional

- RoHS 2002/95/EC compliant
- Cold Side and Hot Side Ceramics: Al_2O_3 , white 96%
- Assembling Solder : SnSb , M. P. 232 °C ; SnCu , M.P. 227 °C

ÛÔG-241-1.0-1.3 power generating TE module

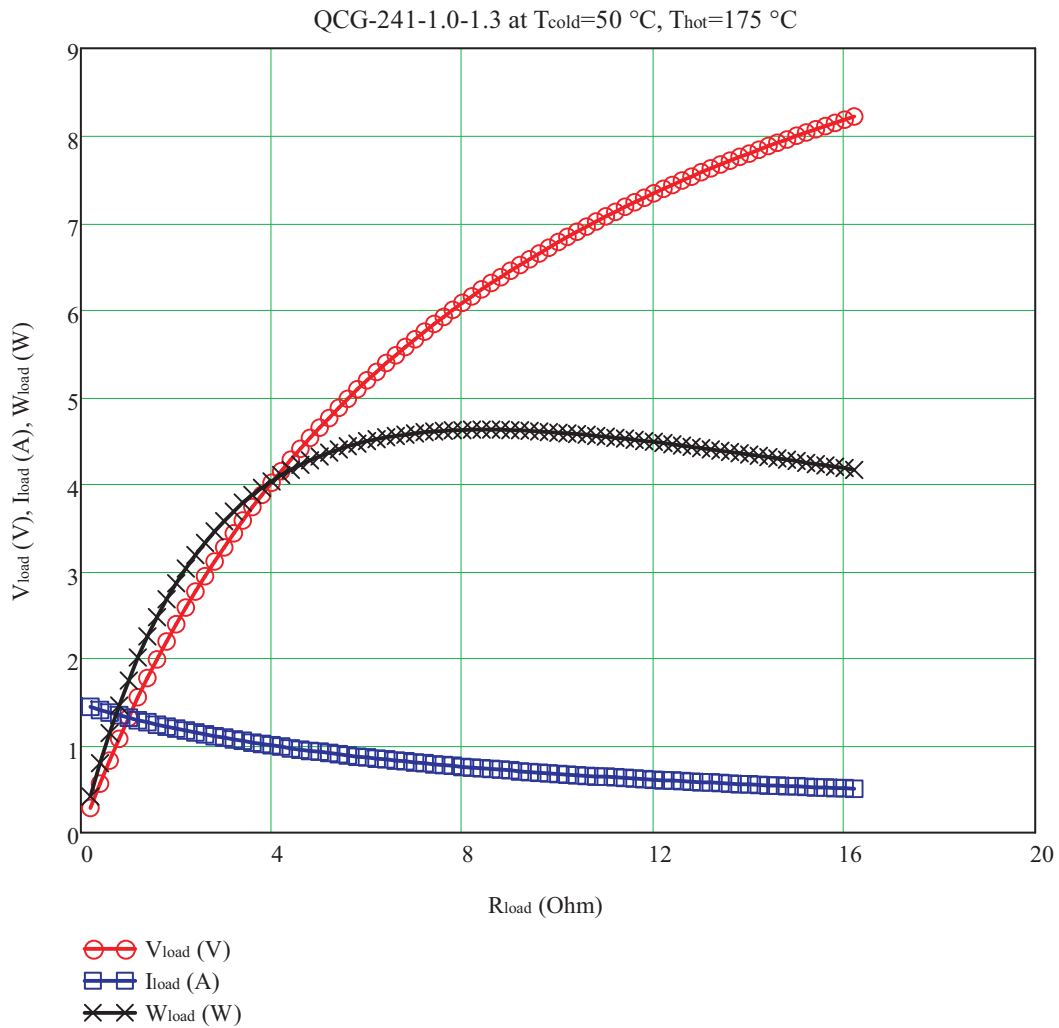

0.63 W/ $^{\circ}\text{C}$ is a thermal conductance of the module at $T_{\text{cold}}=50\text{ }^{\circ}\text{C}$ and $T_{\text{hot}}=175\text{ }^{\circ}\text{C}$

$V_{\text{oc}} = 12.5\text{ V}$ is an open circuit voltage,

R_{load} is a load resistance, Ohm,

W_{load} is an output power corresponded to load resistance R_{load} , W,

V_{load} is an output voltage, corresponded to R_{load} , V.