


# Thermoelectric module QCG-241-1.0-1.6

## Performance Data

$V_{OC}, V$	12.5	$T_{hot}=+175^{\circ}C, T_{cold}=+50^{\circ}C$
$V_{load}, V$	6.3	
$R_{load}, Ohm$	10.3	
$W_{load}, W$	3.8	
$R_{in}, Ohm$	10.3	
Module AC resistance, Ohm	5.6	$25 \pm 0.5^{\circ}C$

Tolerances for thermal and electrical parameters  $\pm 10\%$

Dimensions in millimeters

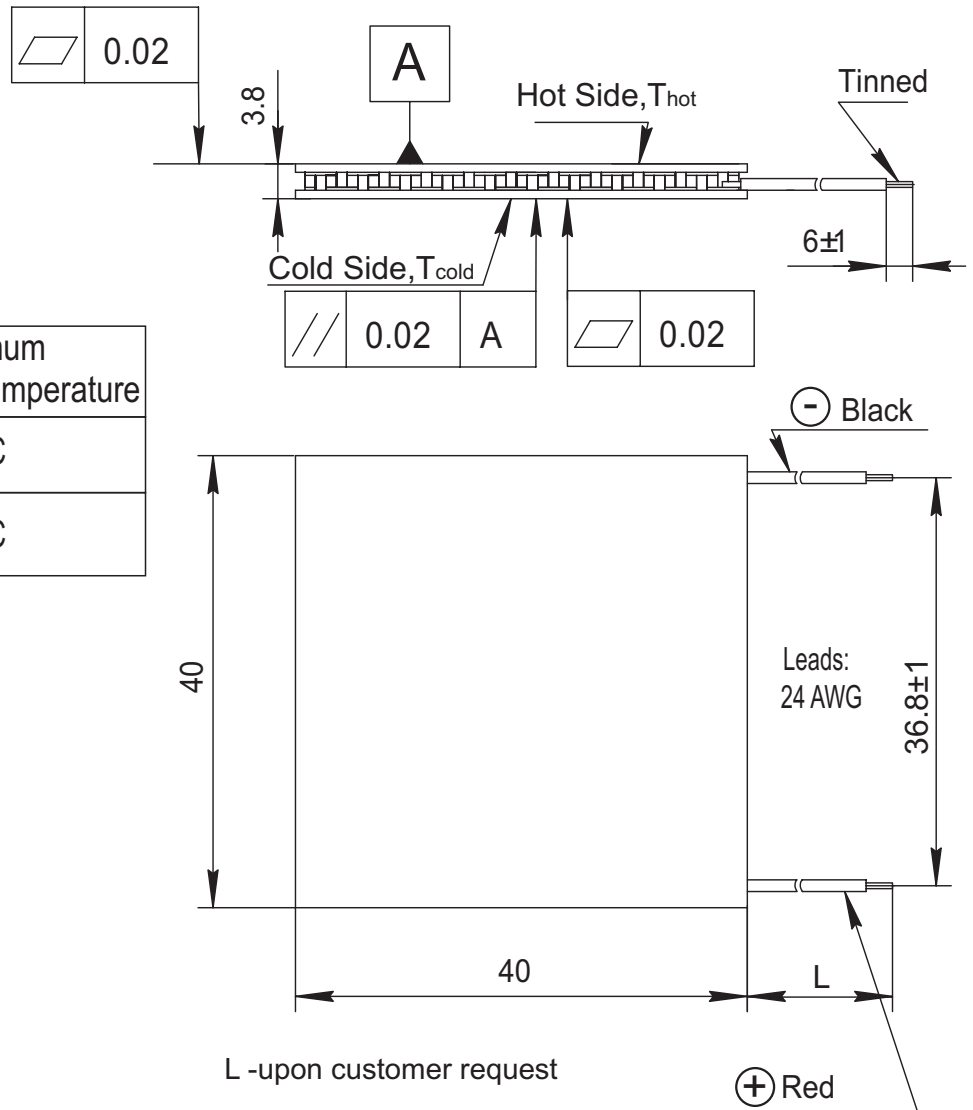


## Options

Lead wire insulation	Maximum processing temperature
Silicone	180°C
PTFE	200°C

## Additional

- RoHS 2002/95/EC compliant
- Cold Side and Hot Side Ceramics:  $Al_2O_3$ , white 96%
- Assembling Solder : SnSb , M. P. 232 °C ; SnCu , M.P. 227 °C

## QCG-241-1.0-1.6 power generating TE module

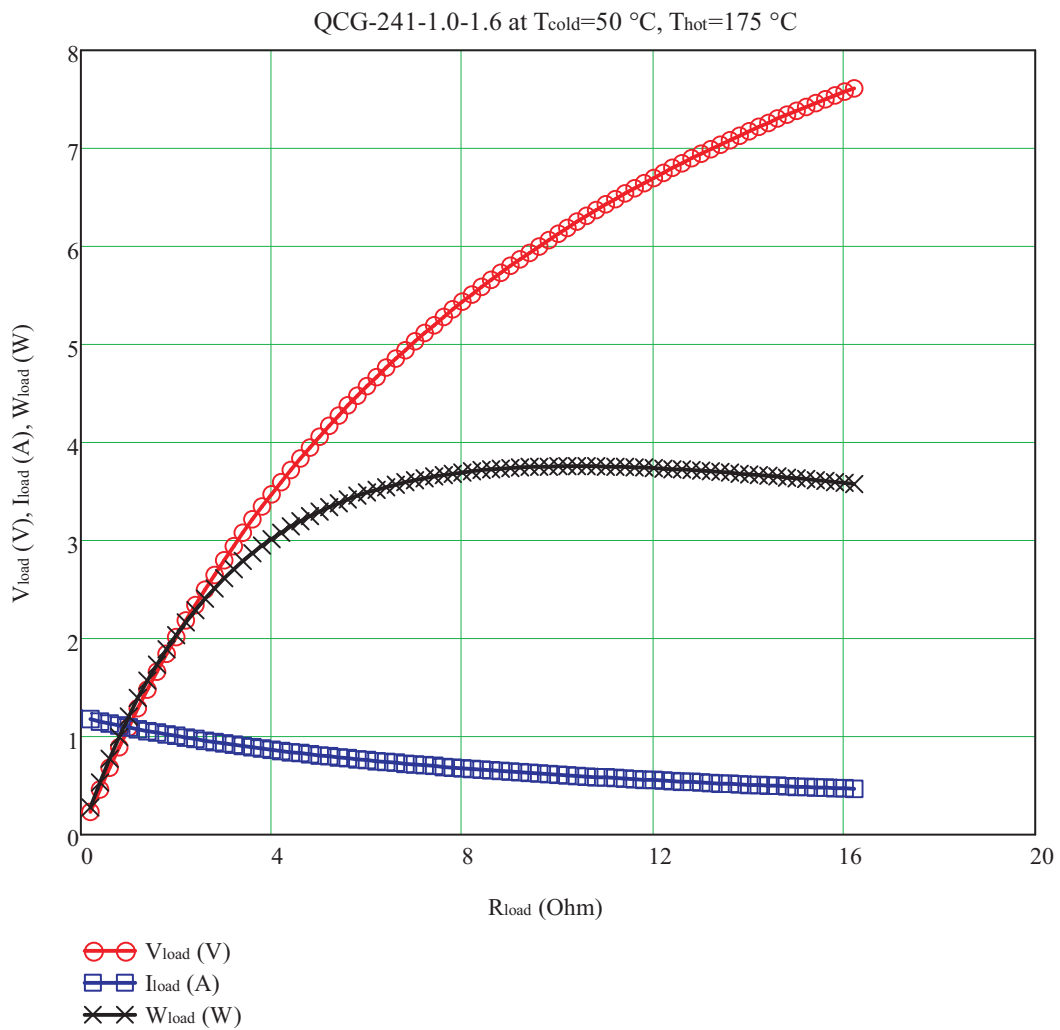

0.51 W/ $^{\circ}\text{C}$  is a thermal conductance of the module at  $T_{\text{cold}}=50\text{ }^{\circ}\text{C}$  and  $T_{\text{hot}}=175\text{ }^{\circ}\text{C}$

$V_{\text{oc}} = 12.5\text{ V}$  is an open circuit voltage,

$R_{\text{load}}$  is a load resistance, Ohm,

$W_{\text{load}}$  is an output power corresponded to load resistance  $R_{\text{load}}$ , W,

$V_{\text{load}}$  is an output voltage, corresponded to  $R_{\text{load}}$ , V.